




**LOFTNESS**  
***cool flow***  
*Auxiliary Hydraulic Cooler*



**MINIMAL  
PROFILE.  
MAXIMUM  
PERFORMANCE.**

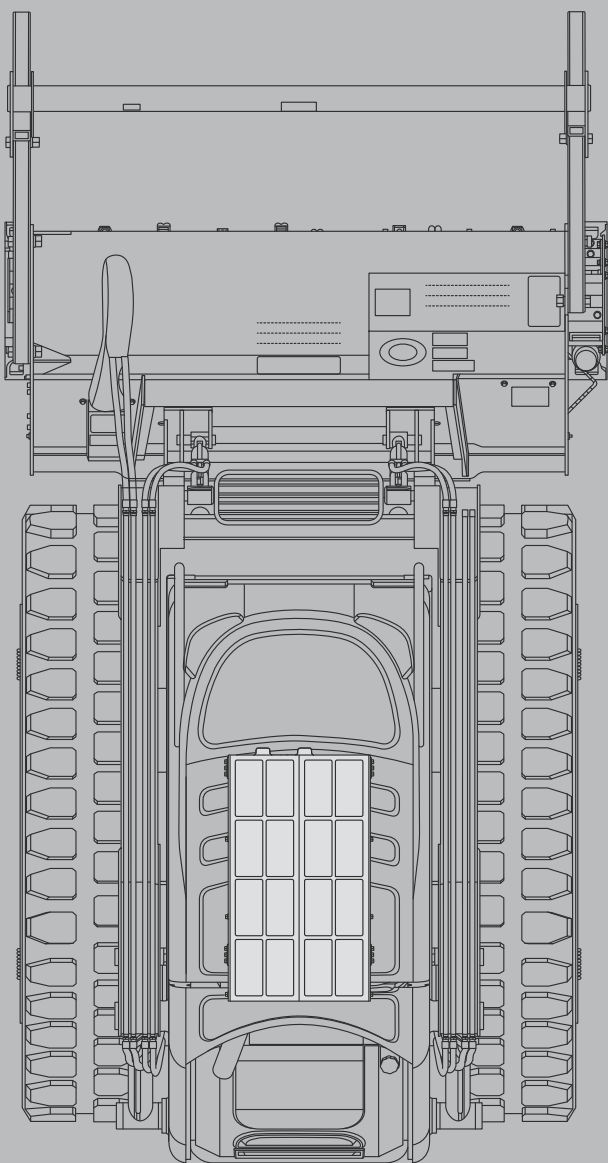




# KEEP YOUR COOL WHEN THE DEADLINE IS HOT!

**Skid steers aren't engineered to be dainty, but they still have their limits.** High temperatures and demanding attachment loads can overheat hydraulic systems and cause costly downtime. Safely push your skid steer for maximum performance with the Loftness Cool Flow.

This roof-mounted auxiliary cooler simultaneously cools hydraulic attachments and the skid steer, so the work continues as long as you do. The updated Cool Flow has an increased capacity to 120,000 BTU's per hour, and a decreased overall profile so there's less chance of running into overhead obstructions.

## // *Reversible Hydraulic Flow*

The Cool Flow is engineered to allow full hydraulic flow to the attachment from either direction with no risk of damage. This flexibility is highly useful for multiple attachment styles. The design also protects the cooler if an operator accidentally reverses hoses, or if a coupler becomes detached.

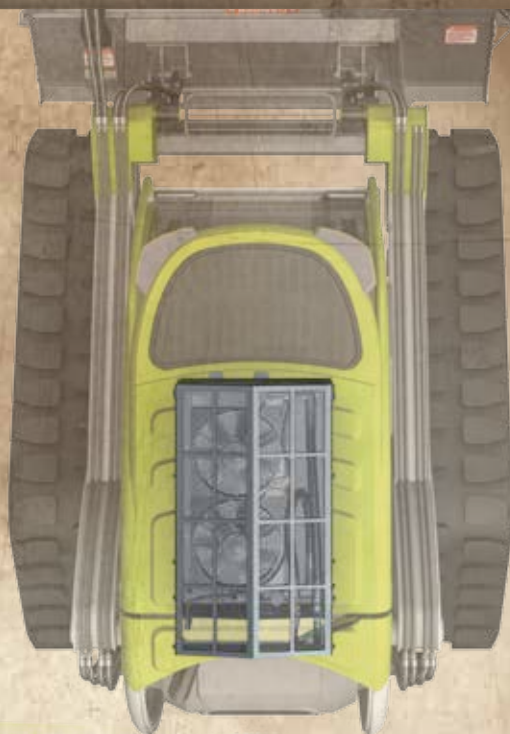

## // *Cooling With, Or Without Attachment*

The Cool Flow is roof-mounted, and stays with your skid steer. Because of this, the cooler provides auxiliary cooling with any other professional, extreme-duty attachments. No extra wires. No additional steps. Just hook and unhook attachments normally.





## COOL FLOW SPECIFICATIONS

### FLOW CAPACITY:

10-45 GPM

### CORE CONSTRUCTION:

Aluminum brazed

### COOLING FAN SIZE:

(2) 11-inch diameter

### COOLING CAPACITY:

120,000 BTU/hour

### WIDTH:

20.75" (0.53 m)

### LENGTH:

35" (0.89 m)

### HEIGHT:

14" (0.36 m)

### WEIGHT:

235 LBS (106.6 kg)

## // FEATURES



**High Capacity Cooling:** Twin 11-inch diameter fans, an aluminum brazed core and a peak flow of 45 GPM push cooling to 120,000 BTU's per hour. Fan speed is controlled by a 12-volt system and an automatic thermostatically controlled on/off switch.



**Easy Access:** The bottom screen slides out for convenient debris removal, and the top heavy-duty protective screen can be easily removed.



**Roof-Mounted:** A universal mounting system permanently attaches the Cool Flow to a skid steer's cab. This reduces contamination and attachment vibrations, as well as decreases the likelihood of damage from an impact.



**Professional Grade Construction:** High quality craftsmanship, a heavy-duty frame and premium screens combine for a product that is built to perform under the most demanding working conditions.

SEE THE FULL LIST OF  
FEATURES AND SPECS AT  
**LOFTNESS.COM**

or call 800-828-7624

**LOFTNESS** 



## OTHER EQUIPMENT FROM LOFTNESS



LOFTNESS  
**carbide G4  
CUTTER**

LOFTNESS  
**timber AX**



LOFTNESS  
**flail HYDRO  
MOWER**

LOFTNESS  
**carbide EX HYDRO  
CUTTER**



// GRAIN BAGGING

// CROP SHREDDERS

// SNOW BLOWERS

// VEGETATION MANAGEMENT

LOFTNESS  
**cool flow**  
Auxiliary Hydraulic Cooler

Call us or visit [loftness.com](http://loftness.com)  
for more information  
on the new Cool Flow.

LOFTNESS

Loftness Specialized Equipment  
P.O. Box 337  
Hector, Minnesota 55342 USA

Toll Free US & Canada: 800-828-7624  
International 320-848-6266  
email: [info@loftness.com](mailto:info@loftness.com)  
[www.loftness.com](http://www.loftness.com)

Specifications, data, and pricing information herein is subject to change without notice.  
Cool Flow and Timber AX are trademarks of Loftness Corporation.

L10043 - Cool Flow - 04/16